

SCP SCIE

ALL SAMPLE TYPES


Eliminate the need to change ICP
Sample Introduction components for different applications by using the

MINI X-FLOW NEBULIZER

Whether your samples are clean waters, suspensions, sludges or in an HF environment, the Mini X-Flow Nebulizer can handle them all - and with the best performance coupled to a Cyclonic Spray Chamber.

EXCELLENT SIGNAL TO BACKGROUND RATIOS*

BETTER DETECTION LIMITS*

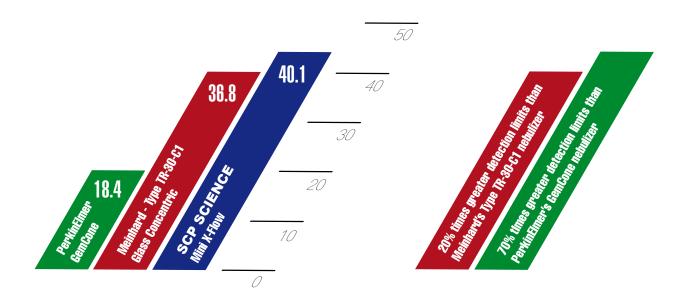

AND MUCH MORE...

Proven short-term and long-term stability*

Short wash-out times*

Run up to 30% total dissolved solids (%TDS)

Excellent for high salts and medium particulates*

OPERATIONAL SPECIFICATIONS

| SAMPLE FLOW RATE: | OPERATING PRESSURE: | ARGON GAS FLOW RATE: |
|--------------------|---------------------|----------------------|
| 0.8 - 3.0 ml / min | 25 - 40 psi | 1.0 L / min |

The Mini X-Flow nebulizer is supplied with both sample inlet tubing and gas inlet tubing. An instrument gas connection, also manufactured from acid resistant Ultem, is fitted on the gas line for a click-in-place installation. Match your cyclonic spray chamber with your Mini XFlow Nebulizer.

ORDERING INFORMATION

MINI X-FLOW NEBULIZER CATALOG NO 020-060-611

To order or request additional product information, please contact your local sales representative, distributor or log on to our ecommerce site via **www.scpscience.com**. Enter Promo Code **MXFQ1.**

*All results are based on internal studies and available on request.

CANADA • USA

Tel.: (800) 361-6820/+1 (514) 457-0701 Fax: (800) 253-5549/+1 (514) 457-4499

FRANCE

Tel.: +33 (0) 1 69 18 71 17 Fax: +33 (0)1 60 92 05 67 INTERNATIONAL

Tel.: +1 (514) 457-0701 Fax: +1 (514) 457-4499 ONLINE

Website: www.scpscience.com Email: sales@scpscience.com